

9. Any sand fencing or other dune restoration material placed in the project area shall be installed as follows:
- A maximum of 10 foot- long spurs of parallel fence spaced at a minimum of 7 feet apart shall be installed on a northeast-southwest (diagonal) alignment (**Figure 15**).

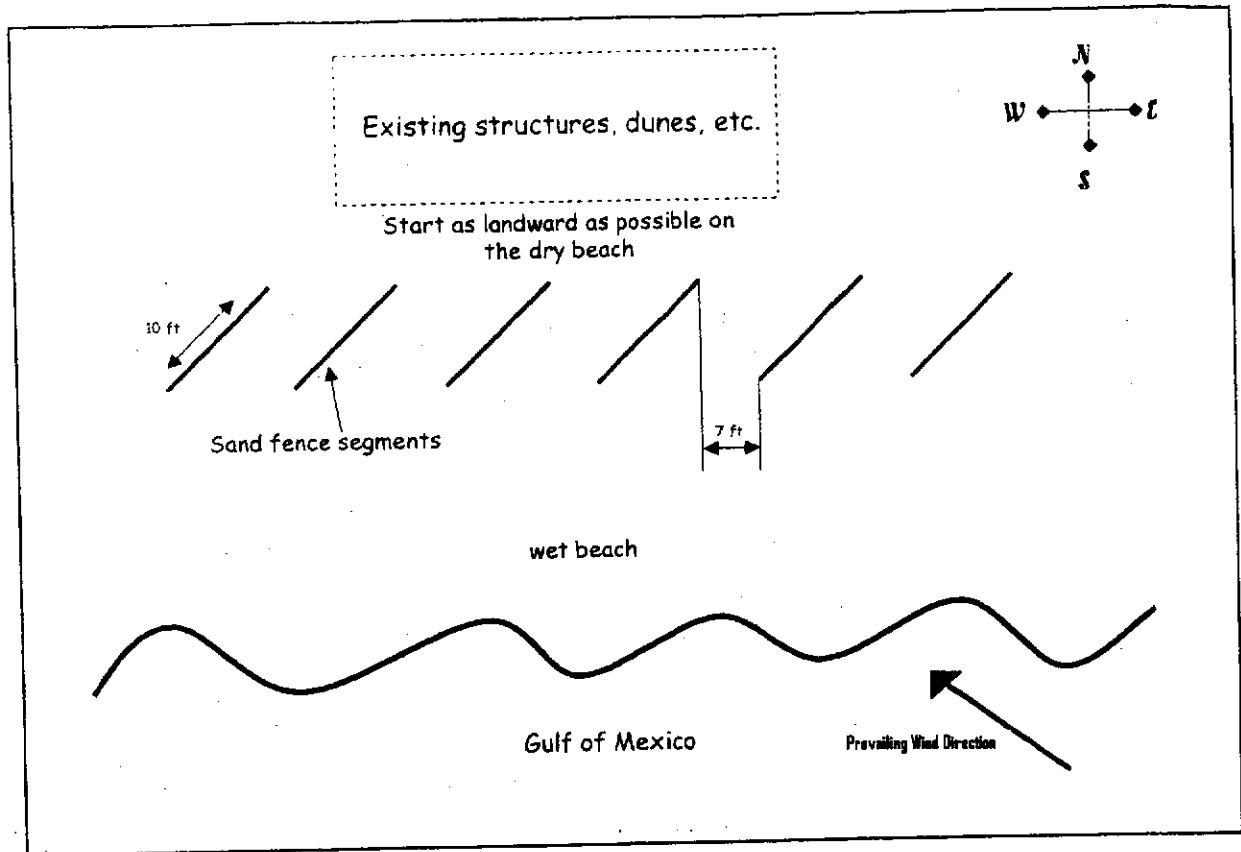


Figure 15. Dune restoration fence alignment.

- All fence material shall be repositioned as necessary to facilitate dune building and shall be removed when 30 percent of the fence is covered with sand.
- Upon site inspection by the Fish and Wildlife Service, Florida Department of Environmental Protection, Bureau of Beaches and Coastal Systems, or the Florida Fish and Wildlife Conservation Commission, Bureau of Protected Species Management, if it is determined that the fence adversely impacts nesting or hatchling turtles, the fence shall be removed or repositioned, as appropriate.